


DOOR NUMBER	QTY	OPENING		MODEL	GA.	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"J"	MOUNT TYPE	OPER.	DRIVE	JAMB TYPE	GUIDE	JOB:		
		WIDTH	HEIGHT																			
																					DISTRIBUTOR:	
																						CONTRACTOR:
																						ARCHITECT: NR:2904119



DURACOIL BASIC MODEL LFF
 INTERIOR FACE MOUNT UNDER LINTEL
 MANUAL LIFT

DURACOIL

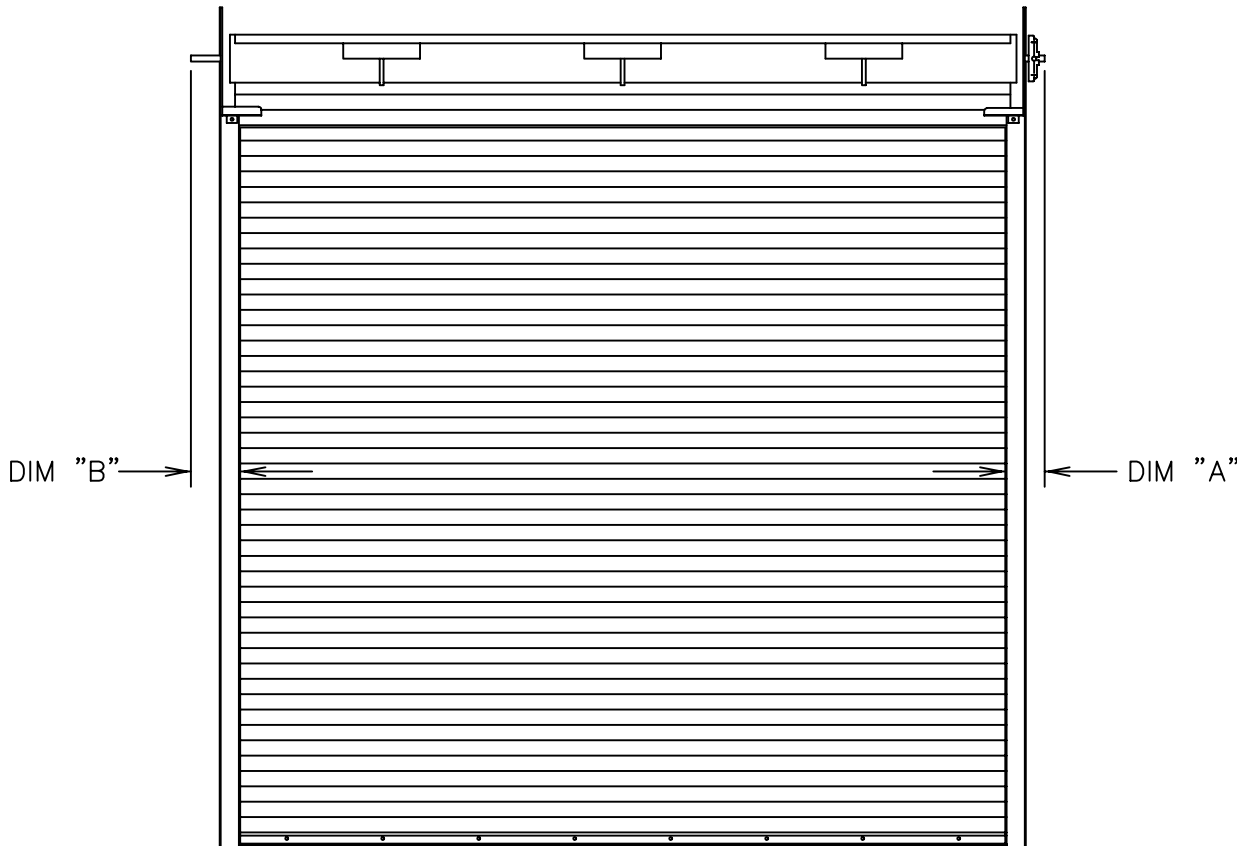

LEFT HAND DRIVE
 (SHOWN)

RIGHT HAND DRIVE

"ELEVATION"

DOORS SHALL BE ROLLING STEEL MODEL DURACOIL "BASIC"
 (STANDARD SERVICE DOOR) AS MANUFACTURED BY RAYNOR GARAGE
 DOORS.

BRACKETS- STEEL PLATES, MINIMUM 10 GA. GALVANIZED STEEL,
 ATTACHED WITH 1/2" (12.7MM) DIAMETER CLASS 5 CASE HARDENED
 BOLTS. THE INSIDE OF THE BRACKET IS FITTED WITH A SEALED BALL
 BEARING.

BARREL- STRUCTURAL STEEL PIPE, MINIMUM 4-1/2"(114.3mm)
 O.D.X.120" (3.0mm) WALL THICKNESS AND DESIGNED TO LIMIT MAXIMUM
 DEFLECTION, UNDER LOAD, TO .03"(0.76mm) PER FOOT OF SPAN.

SPRING COUNTERBALANCE- THE CURTAIN SHALL BE COUNTERBALANCED
 BY MEANS OF OIL TEMPERED, HELICAL TORSION SPRINGS, GREASE-
 PACKED AND MOUNTED ON A SINGLE CONTINUOUS STEEL TORSION
 SHAFT. SPRINGS SHALL BE COMPRESSION SPRING DESIGN TO
 FACILITATE ANY COUNTERBALANCE MAINTENANCE. CAST IRON SPRING
 ANCHORS SHALL TRANSFER FULL SPRING LOADING TO THE BARREL.

HOOD- SHALL BE 24 GA. COMMERCIAL QUALITY HOT-DIPPED GALVANIZED
 STEEL. HOOD TO HAVE ROLLED EDGES TO PROVIDE RIGIDITY.


GUIDES- FORMED FROM A 16 GA., GALVANIZED CHANNEL FASTENED
 TO A MINIMUM 2 1/2" (63.5MM) X 2 1/2" (63.5MM) 11 GA.
 GALVANIZED STEEL WALL ANGLE.

MODEL LFF

CURTAIN- INTERLOCKING SLATS ROLLFORMED FROM COMMERCIAL
 QUALITY HOT DIPPED GALVANIZED (G-60) STEEL PER ASTM A-653.
 FINISH SHALL BE A TWO COAT BAKED ON PRIME PAINT APPLIED
 PRIOR TO ROLLFORMING. MALLEABLE IRON GALVANIZED ENDLOCKS
 FASTENED TO ALTERNATE SLATS WITH TWO ZINC PLATED STEEL
 RIVETS PER LOCK. ELIMINATES LATERAL MOVEMENT AND PREVENT
 SLATS FROM WEARING AT SURFACES COMING IN CONTACT WITH
 GUIDES. BOTTOM OF CURTAIN SHALL BE REINFORCED WITH AN
 EXTRUDED T-SHAPED BAR. BOTTOM BAR SHALL BE PROVIDED
 WITH A U-SHAPED ASTRAGAL WEATHERSEAL.

- HOOD-OMIT
- HOOD-SHALL BE 24 GA. COMMERCIAL QUALITY HOT-DIPPED
 GALVANIZED STEEL WITH ROLLED EDGES TO PROVIDE
 STRUCTURAL RIGIDITY.
- LOCKING- SLIDE BOLT TO ENGAGE GUIDE WITH PROVISION FOR
 PADLOCK. (PADLOCK BY OTHERS) QUANTITY REQUIRED
- LOCKING- FIVE PIN TUMBLER CYLINDER WITH LOCK BARS TO ENGAGE
 THE GUIDE. QUANTITY REQUIRED
- LOCK-OPERABLE FROM INTERIOIR ONLY.
- LOCK-OPERABLE FROM EXTERIOIR ONLY.

DOOR NUMBER	QTY	OPENING		MODEL	GA.	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"J"	MOUNT TYPE	OPER.	DRIVE	JAMB TYPE	GUIDE	JOB:		
		WIDTH	HEIGHT																			
																					DISTRIBUTOR:	
																						CONTRACTOR:
																						ARCHITECT:
																					NR:2904119	



SLAT MODEL "LFF"

