


DOOR NUMBER	QTY	OPENING		ACTUAL		MODEL	JAMB W x S	MOUNTING ANGLE BRKT	LOOK	PANELS		SECTION NUMBER	OPEN FOR GLASS																											
		WIDTH	HEIGHT	WIDTH	HEIGHT					WIDE	HIGH		1	2	3	4	5	6	7	8																				

JOB:	RAYNOR
DISTR:	
CONTR:	
ARCH:	NR:2902471

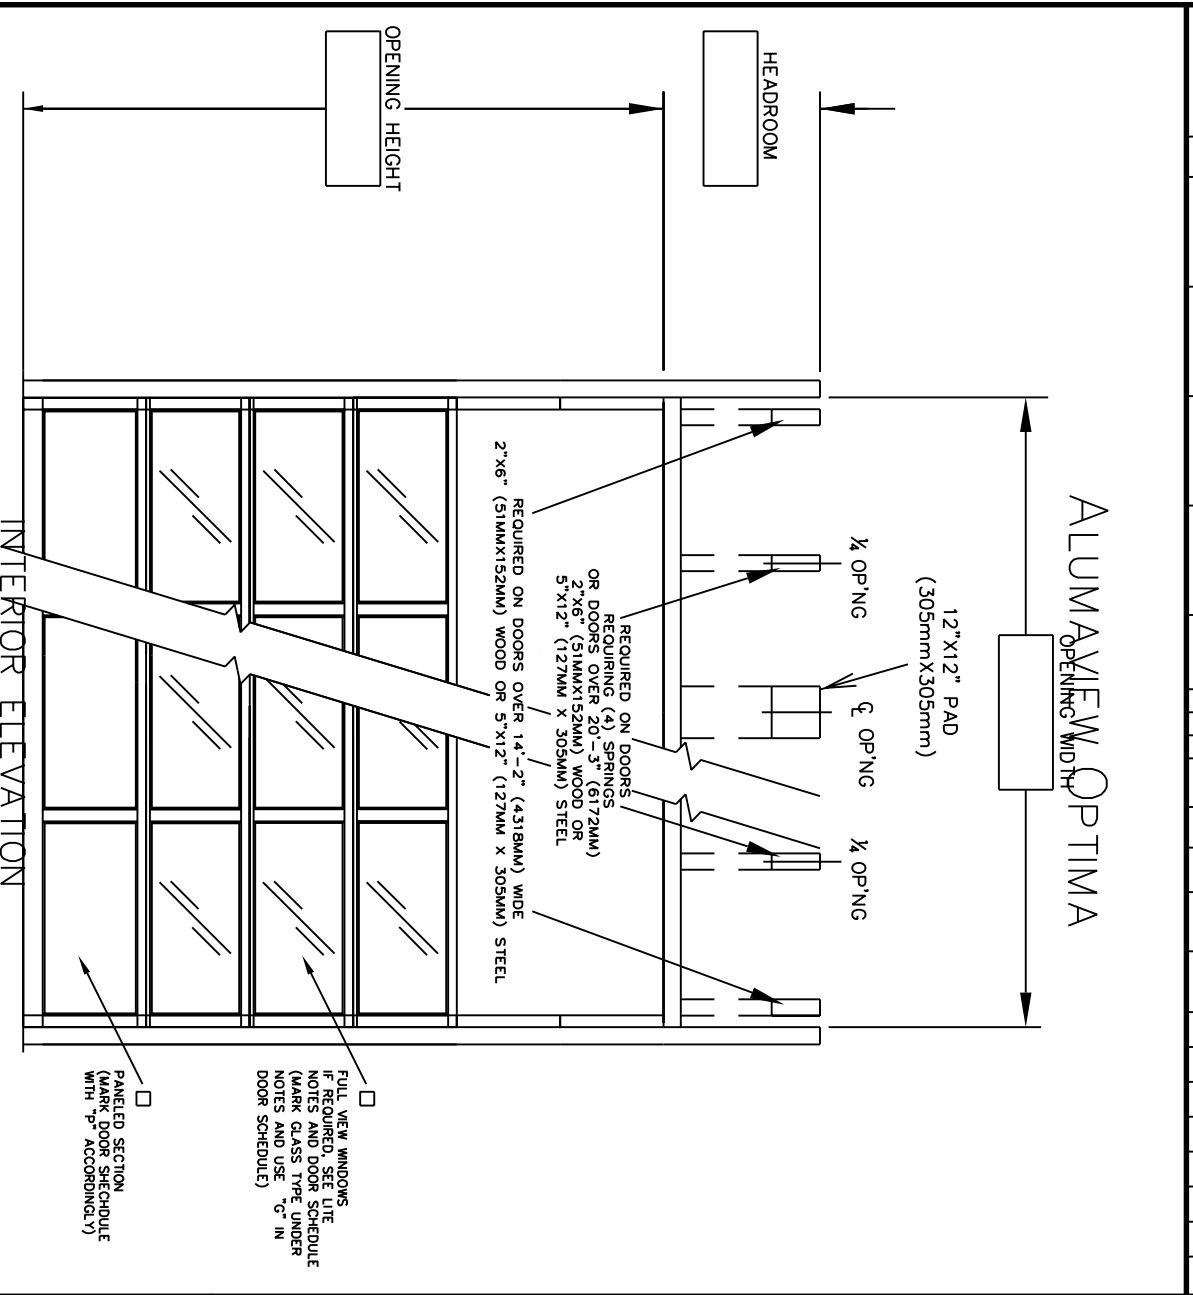

1) DOORS SHALL BE RAYNOR SECTIONAL OVERHEAD TYPE ALUMAVIEW OPTIMA "HL" AS MANUFACTURED BY RAYNOR GARAGE DOOR CO. SECTIONS SHALL BE 2" (50.8MM) THICK 6063T6 ALUMINUM ALLOY FRAME WITH .050" (1.3mm) THICK ALUMINUM PANELS. GALVANIZED RAILS TO BE JOINED TOGETHER WITH 5/16" (7.9MM) GALVANIZED THROUGH BOLTS, CH PANELS AND GLASS TO BE COMPLETELY ENCASED IN EXTRUDED ALUMINUM RETAINER. BOTTOM RAIL TO BE 5-1/8" (130.2mm) TOP RAILS TO BE 3-1/4" (82.5mm). THE COMBINED DIMENSION OF THE TWO MEETING INTERMEDIATE RAILS TO BE 3-3/4" (95.2mm). ENDSTILES SHALL BE 3-1/4" (82.5mm), OR 6-1/4" (158.7mm) WIDE, DEPENDING ON SIZE. CENTER STILES TO BE 3-5/8" (92.1mm) WIDE. BOTTOM RAIL OF DOOR TO HAVE VINYL WEATHERSTRIP TO SEAL DOOR TO FLOOR. EXTRUSIONS AND PANELS TO BE ETCHED AND LEPTON TO 2025 (6147mm) WIDE. IN PAINTED BROWN OR WHITE. SPECIAL ANODIZED FINISHES OR ARMORBRITE COLORS AVAILABLE.

- GLASS (CLEAR)----- (DSB 3/16"(4.8MM) OR DSB 1/4" (6.4MM))
- GLASS (WIRE)----- (DSB 3/16"(4.8MM) OR DSB 1/4" (6.4MM))
- GLASS (TEMPERED)----- (1/8"(3.2MM), 3/16"(4.8MM) OR 1/4" (6.4MM))
- PLEXIGLASS----- (1/8"(3.2MM) OR 1/4" (6.4MM))
- LEXAN----- (1/8"(3.2MM) OR 1/4" (6.4MM))
- LOCKING - CREMONE TYPE BOLT ENGAGES SLOT IN TRACK, ----- HAND SIDE. FIVE PIN TUMBLER CYLINDER OUTSIDE - NIGHT LATCH INSIDE.
- LOCKING - SPRING LOADED SLIDE BOLT ENGAGES SLOT IN TRACK. OPERABLE FROM INSIDE ONLY - MAY BE MOUNTED EITHER SIDE
- LOCKING - OMIT LOCK.
- LOCKS SHOULD NOT BE SUPPLIED WITH AN ELECTRIC OPERATED DOOR WITHOUT A LOCK INTERLOCK SWITCH.

