


DOOR NUMBER	QTY	OPENING		ACTUAL		MODEL	JAMB			LOOK	PANELS		SECTION NUMBER	OPEN FOR GLASS
		WIDTH	HEIGHT	WIDTH	HEIGHT		W	S	M		ANGLE	ERKT		

JOB:	
DISTR:	
CONTR:	
ARCH:	

ALUMAVIEW STANDARD

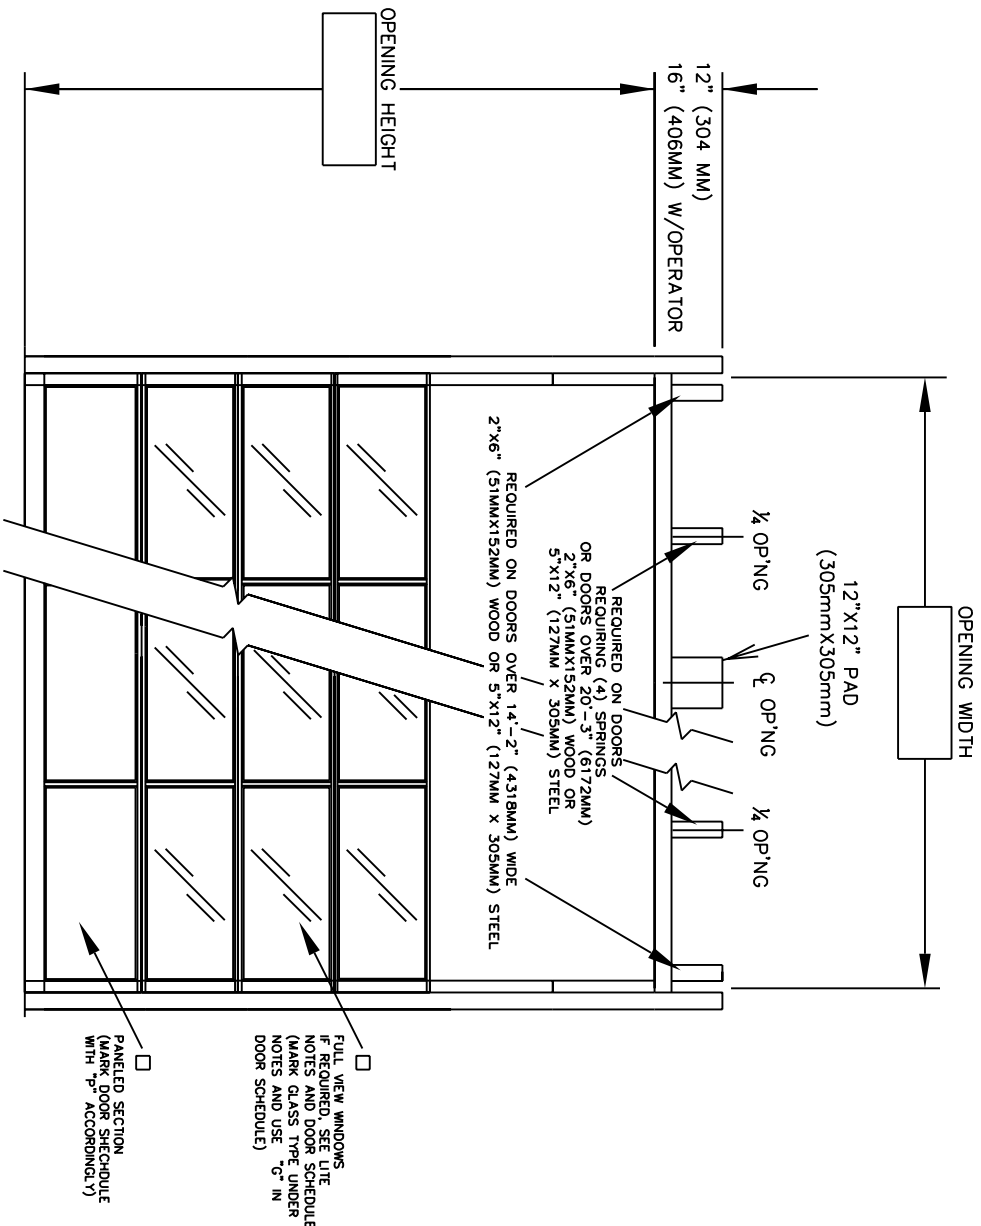

1) DOORS SHALL BE RAYNOR SECTIONAL OVERHEAD TYPE ALUMAVIEW STANDARD TYPE AS MANUFACTURED BY RAYNOR GARAGE DOOR CO. SECTIONS SHALL BE 1-3/4" (44.4mm) THICK 6063T6 ALUMINUM ALLOY FRAME WITH .050" (1.3mm) THICK ALUMINUM PANELS. SILES AND RAILS TO BE JOINED TOGETHER WITH 1/4" X (6.4mm) RAYNOR SILENERS AND GLASS TO BE SET IN FLUORINATED POLYURETHANE BOTTOM/TOP RAILS TO BE 2-5/8" (66.7mm) OR 4-5/8" (117.5mm) COMBINED DIMENSION OF THE TWO MEETING INTERMEDIATE RAILS TO BE 1-1/2" (38.1mm). END STILES SHALL BE 2-5/8" (66.7mm) ENCLOSED TYPE IN LIEU OF OPEN END TYPE. INTERMEDIATE RAILS TO HAVE INTEGRAL REINFORCED WEB 1-3/8" (34.9mm) DEEP BOTTOM FLOOR EXPANSION AND PANELS TO BE FINISHED AND CLEAR ANODIZED TO MEET SPEC. 204RT SPECIAL ANODIZED FINISHES OR ARMORBRITE COLORS AVAILABLE.

- GLASS (CLEAR) ----- (DSB 3/16" (4.8MM) OR DSB 1/4" (6.4MM))
- GLASS (WIRE) ----- (DSB 3/16" (4.8MM) OR DSB 1/4" (6.4MM))
- GLASS (TEMPERED) ----- (1/8" (3.2MM), 3/16" (4.8MM) OR 1/4" (6.4MM))
- PLEXIGLASS ----- (1/8" (3.2MM) OR 1/4" (6.4MM))
- LEXAN ----- (1/8" (3.2MM) OR 1/4" (6.4MM))
- LOCKING - CREMONE TYPE BOLT ENGAGES SLOT IN TRACK, ----- HAND SIDE. FIVE PIN TUMBLER CYLINDER OUTSIDE - NIGHT LATCH INSIDE.
- LOCKING - SPRING LOADED SLIDE BOLT ENGAGES SLOT IN TRACK. OPERABLE FROM INSIDE ONLY - MAY BE MOUNTED EITHER SIDE
- LOCKING - OMIT LOCK.
- LOCKS SHOULD NOT BE SUPPLIED WITH AN ELECTRIC OPERATED DOOR WITHOUT A LOCK INTERLOCK SWITCH.

